

45W Type-C

Q36-Wall Mount Type
USB-C PD Power Adapter



SAFETY APPROVALS | UL, TUVGS, CE, CB, FCC, RCM, UKCA

FEATURES

100-240VAC Universal Input
Meet CEC, Energy Star 3.0 (EPA/DOE—Level VI)
3 Years Warranty

Q36 Type-C	O/P Voltage	O/P Current	Watt	O/P Voltage	O/P Current	Watt
	5.0V	3A	15W	15.0V	3A	45W
	9.0V	3A	27W	20.0V	2.25A	45W
	12.0V	3A	36W			

INPUT CHARACTERISTICS

Rated Input Voltage 100-240V AC
Rated Frequency 50/60Hz
Steady AC Current 1.1A(Max) Measured at 100Vac input and maximum load
Inrush Current Less than 100A
Empty Loaded Wasting 75mW at 5V output

SAFETY STANDARDS

LVD UL62368-1/UL60950-1
IEC62368-1/IEC60950-1 EN62368-1
EMC & EMI EN55032 EN55024 EN61000-3-2 EN61000-3-3

RELIABILITY ITEMS

Hi-Pot Test AC 3000V1min between input plug-DC plug
Leakage Current 0.25mA max at nominal AC input voltage and frequency
Temperature Rise Case surface rise 95°C or less

OUTPUT CHARACTERISTICS

Power 45W MAX
Load Regulation ±5%
Turn on delay time 3s Max at AC 115V, Max output load
Hold up time 5ms Min at AC 115V, Max output load
Rise up time 40ms Max at AC 115V, Max output load
Efficiency Meet CEC, Energy Star 3.0 (EPA/DOE—Level VI)

PROTECTION

Over Voltage Protection Auto Recovery
Short Circuit Protection Auto Recovery
Over Current Protection Auto Recovery
Protection Class Class II


ENVIRONMENTAL

Operation Temperature -10 °C – 40 °C
Storage Temperature -25 °C – 70 °C
Operation Humidity 5%(0°C) ~ 90%(40°C)
Storage Humidity 5%~ 95%

MECHANICALS

Cable
UL1185
18AWG
20AWG,
1750mm

Case Material
UL94-V1

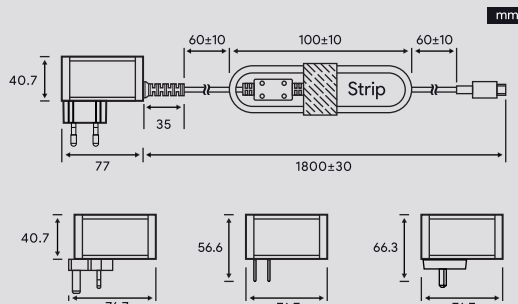

Case Dimension

Weight

Region	Case Dimension	Weight
EU(V)	L76.7*W77.8*H29.5mm	104g (Ref.)
UK(B)	L76.7*W70.0*H29.5mm	109g (Ref.)
US(U)	L76.7*W56.6*H29.5mm	104g (Ref.)
AU(S)	L76.7*W66.3*H29.5mm	104g (Ref.)